

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS


IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G05B 5/01, 13/04	A1	(11) International Publication Number: WO 96/31811 (43) International Publication Date: 10 October 1996 (10.10.96)
(21) International Application Number: PCT/US96/04486 (22) International Filing Date: 1 April 1996 (01.04.96) (30) Priority Data: 08/415,882 3 April 1995 (03.04.95) US (71) Applicant: HONEYWELL INC. [US/US]; Honeywell Plaza - MN12-8251, P.O. Box 524, Minneapolis, MN 55440-0524 (US). (72) Inventor: LU, Zhuxin, J.; 19513 N. 73rd Lane, Glendale, AZ 85308 (US). (74) Agent: SAPELLI, Arthur, A.; Honeywell Inc., Honeywell Plaza - MN12-8251, P.O. Box 524, Minneapolis, MN 55440-0524 (US).		(81) Designated States: CA, CN, JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

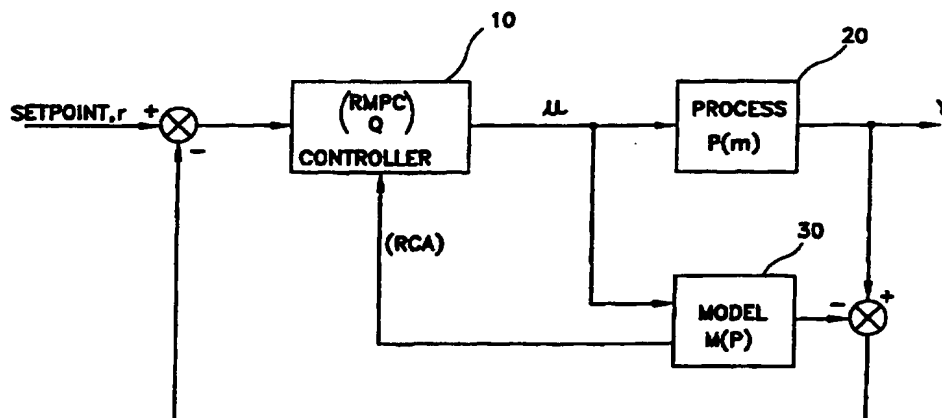(54) Title: A METHOD OF OPTIMAL SCALING OF VARIABLES IN A MULTIVARIABLE PREDICTIVE CONTROLLER UTILIZING RANGE CONTROL**(57) Abstract**

A process control system which includes at least one manipulated variable and at least one controlled variable, provides a method for robust control of a process. Predetermined constraints of the manipulated variables and the controlled variables, and the present values of the manipulated variables are obtained. A set of scale factors for the manipulated variables and the process variables are calculated. The controller (10) is initialized with the set of scale factors, the scale factors determining the relative importance of the manipulated variables and the process variables to the process. New values are calculated for the controlled variables for a predetermined number of points in the future, such that the values of the controlled variables are within the predetermined range thereby obtaining an optimal robustness of the resultant controller. The manipulated variables are also calculated to be within predetermined constraints, and the controlled variables to fall within a predetermined range when controllable. From a plurality of solutions, a most robust solution is selected. Then the manipulated variables are adjusted to cause the process control system to drive the values of the controlled variables to the calculated values.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

A METHOD OF OPTIMAL SCALING OF
VARIABLES IN A MULTIVARIABLE PREDICTIVE
CONTROLLER UTILIZING RANGE CONTROL
BACKGROUND OF THE INVENTION

5 The present invention relates to control systems, and more particularly, to a method of determining the weight of the controlled and manipulated variables of a robust multivariable predictive controller (RMPC) utilizing range control.

 In current systems, the controller (RMPC) has no idea of the importance of the controlled variables and manipulated variables, thus requiring the operator (or engineer)
10 to "tell" the controller which is the most important variable, the second most important variable,... or if the variables are of equal importance. The user inputs the importance (or weight) of the variables as part of the initialization procedure of a robust multivariable predictive controller. The importance of the controlled variables (cv) or manipulated variables (mv) is a function of several factors, including the units utilized
15 for the cvs and mvs. Engineers currently account for the units for the cvs and mvs and attach an importance to the high-low weights of the cvs and mvs.

 Assume for example there are three controlled variables, cv1, cv2, and cv3, where cv1 is a temperature, cv2 is a pressure, and cv3 is a concentration variable of the process, all of course in different engineering units. In this instance one controlled
20 variable can be more important to the controller than another controlled variable. If the pressure is in small engineering units (PSI) which can have a range up to 25,000 PSI, each unit of pressure change may not be as important as 1° of temperature change for

the process. If the pressure, however, is in atmospheres, then one atmosphere change in pressure may be more significant than 1° of temperature change.

In the present invention, there is provided an optimal solution for an RMPC in the off-line that will determine in a relative sense how important each cv and mv is to the process. Thus, the operator does not have to be concerned with making the determination. The user can still override or fine-tune the solution output (i.e., the weight for the individual variables can be made more or less), however, the present invention provides the user with an excellent starting point for initializing the controller.

Thus by attaching a weight to the variables of the process, the impact to the system is reduced and results in a more robust controller.

SUMMARY OF THE INVENTION

Therefore, there is provided by the present invention a method of determining the weight of the controlled and manipulated variables of a robust multivariable predictive controller utilizing range control. There is provided by the present invention, a controller which controls each controlled variable of a process to be within a corresponding predetermined range. A process control system includes at least one manipulated variable and at least one controlled variable. A method which provides robust control of a process, comprises the steps of calculating a set of scale factors for the manipulated variables and the process variables. The controller is initialized with the set of scale factors, the scale factors determining the relative importance to the process of the manipulated variables and the process variables. The robust control is initialized to have predetermined constraints of the manipulated variables and the

controlled variables. The present values of the manipulated variables and the controlled variables are then obtained. New values are calculated for the controlled variables for a predetermined number of points in the future, such that the values of the controlled variables are within the predetermined range thereby obtaining an optimal robustness of the resultant controller. The manipulated variables are also calculated to be within predetermined constraints, and the controlled variables to fall within a predetermined range when controllable; otherwise, to keep the controlled variable constraint violations to a minimum. From a plurality of solutions, a most robust solution is selected. Then the manipulated variables are adjusted to cause the process control system to drive the values of the controlled variables to the calculated values.

Accordingly, it is an object of the present invention to provide a method for determining the weight of the controlled and manipulated variable of a robust multivariable predictive controller utilizing range control.

This and other objects of the present invention will become more apparent when taken in conjunction with the following description and attached drawings, wherein like characters indicate like parts, and which drawings form a part of the present application.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a functional block diagram of the process control system in which the present invention may be utilized; and

Figure 2 shows a flow diagram of determining a minimum condition number of the resulting diagonal matrix.

DETAILED DESCRIPTION

In a robust multivariable predictive controller (RMPC) utilizing range control of the present invention, there is devised an optimal solution in an off-line mode that will determine in the relative sense how important each controlled variable (cv) and each manipulated variable (mv) is for the process. A detailed description of the RMPC
5 utilizing range control can be had by reference to U.S. Patent 5,351,184, assigned to the same assignee as the present application, and is incorporated by reference herein to the extent necessary for an understanding of the present invention.

Referring to Figure 1, there is shown a functional block diagram of a process
10 control system in which the present invention may be utilized. A controller 10 has multiple outputs, which are coupled as input variables u to a process 20. The process 20 can include, for example, a plurality of elements which can be controlled such as valves, heaters,.... Process variables y of process 20 include temperature, pressure, concentration,... which govern product quality. The input variables u (or manipulated
15 variables mv), are defined as:

$$mv = \begin{pmatrix} mv_1 \\ mv_2 \\ mv_3 \end{pmatrix}$$

and the output variables y (process variables pn or controlled variables cv), are defined as:

$$cv = \begin{pmatrix} cv_1 \\ cv_2 \\ cv_3 \end{pmatrix}$$

Thus, in this example, the process 20 is a dynamic process $P(s)$ having three (3) manipulated variables and three (3) controlled variables.

The process 20 is defined by G , where G (original model matrix) is:

$$G = \begin{pmatrix} g_{11}, g_{12}, g_{13} \\ g_{21}, g_{22}, g_{23} \\ g_{31}, g_{32}, g_{33} \end{pmatrix}$$

5 Thus, if cv_1 is pressure, cv_2 is temperature and cv_3 is concentration carrying forth the example mentioned previously,

(pressure) $cv_1 = g_{11} \cdot mv_1 + g_{12} \cdot mv_2 + g_{13} \cdot mv_3$

(temperature) $cv_2 = g_{21} \cdot mv_1 + g_{22} \cdot mv_2 + g_{23} \cdot mv_3$

(concentration) $cv_3 = g_{31} \cdot mv_1 + g_{32} \cdot mv_2 + g_{33} \cdot mv_3$

10 As can be seen, pressure is affected by the three respective mv s (mv_1, mv_2, mv_3),....

The values of $g_{11}, g_{12}, g_{13}, \dots$ will vary as a function of the engineering units (or more simply units) selected for the controlled variables.

15 If cv_2 is a linear measure in inches, and if for example purposes g_{21}, g_{22} , and g_{23} are 10, 12, 24, respectively, then :

$$cv_2 (\text{inch}) = 10 \cdot mv_1 + 12 \cdot mv_2 + 24 \cdot mv_3$$

such that for every one unit (i.e., one inch) mv_1 changes cv_2 changes 10 inches, for every inch that mv_2 changes cv_2 changes 12 inches, and for every inch that mv_3 changes cv_2 changes 24 inches. If the units are in feet rather than inches then g_{21}, g_{22} and g_{23} are changed to .8, 1.0, and 2.0, respectively. But, the significance of cv_2 has

20

increased because for every unit change in cv_2 corresponds to a one inch rather than inches change in cv_2 . Thus in the overall control process it is undesirable to have cv_2 deviating from the set point by one unit, as compared to when cv_2 was expressed in inches.

5 Since the controller is not sensitized to units, the controller will try to correct a
cv having a higher deviation from its desired position first. Thus, for example, if cv_x
has a deviation of 2 and cv_y has a deviation of 1 from their respective desired positions,
the controller will try to move cv_x to its desired position first since it has a higher
number; the controller has no knowledge of units. However, a 2 unit deviation in cv_x
10 can be less significant than a 1 unit deviation in cv_y . (For example, if cv_x is in
millimeters and cv_y is in feet, cv_x is 2 millimeters apart versus cv_y which is 1 foot
apart. In this case cv_y should be the parameter of concern.) Thus, there must exist a
higher cv weight on cv_y . Similarly, the selection of units for mv must also be
determined. The present invention determines a scaling factor which includes the units
15 of cvs and mvs.

The method of finding "scaling factors" in accordance with the method of the present invention will now be described. A diagonal matrix is defined such that:

$$G(s) = \begin{bmatrix} DR_1 & 0 & 0 \\ 0 & DR_2 & 0 \\ 0 & 0 & DR_3 \end{bmatrix} \begin{bmatrix} g_{11} & g_{12} & g_{13} \\ g_{21} & g_{22} & g_{23} \\ g_{31} & g_{32} & g_{33} \end{bmatrix} \begin{bmatrix} DC_1 & 0 \\ 0 & DC_3 \end{bmatrix}$$

(Row Scaling) (Column Scaling)

DR determines the importance of each cv, and DC determines the importance of each mv. Then (using matrix algebra operations well known to those skilled in the art:

$$G(s) = \begin{bmatrix} DR_1 \bullet g_{11} \bullet DC_1 & DR_1 \bullet g_{12} \bullet DC_2 & DR_1 \bullet g_{13} \bullet DC_3 \\ DR_2 \bullet g_{21} \bullet DC_1 & DR_2 \bullet g_{22} \bullet DC_2 & DR_2 \bullet g_{23} \bullet DC_3 \\ DR_3 \bullet g_{31} \bullet DC_1 & DR_3 \bullet g_{32} \bullet DC_2 & DR_3 \bullet g_{33} \bullet DC_3 \end{bmatrix}$$

(Scaled)

- 5 Next, find a pre scale factor (row scale factor) and a post scale factor (column scale factor) such that the condition number of the resulting matrix [G(s) scaled matrix] is minimized. The minimized condition number always gives optimal importance selecting (i.e., optimal scaling or optimal weighting).

- 10 The optimal scaling factors, DR and DC, are determined in accordance with the flow diagram of Figure 2. In order to find a minimum condition number an iterative process is performed.

The process starts with $t_0 = \infty$ (where t_0 = condition number of (G) = $\text{cond}(G)$) where G is:

$$G = \begin{bmatrix} g_{11} & \dots & g_{1m} \\ \vdots & & \vdots \\ g_{n1} & & g_{nm} \end{bmatrix}$$

15

DR is calculated (block 101) where:

$$DR = \begin{bmatrix} DR_1 & \\ & DR_n \end{bmatrix}$$

$$DR_1 = \left(\sqrt{\sum_{j=1}^m g_{1j}^2} \right)^{-1}$$

$$DR_i = \left(\sqrt{\sum_{j=1}^m g_{ij}^2} \right)^{-1} \quad \text{for } i = 1 \text{ to } n$$

DC is then calculated (block 105) where:

$$5 \quad DC = \begin{bmatrix} DC_1 & & \\ & & \\ & & DC_m \end{bmatrix}$$

$$DC_1 = \left(\sqrt{\sum_{i=1}^n g_{i1}^2} \right)^{-1}$$

$$DC_j = \left(\sqrt{\sum_{i=1}^n g_{ij}^2} \right)^{-1} \quad \text{for } j = 1 \text{ to } m$$

10

The values of DR and DC are saved for each iteration.

Cond (G) is calculated (block 110) where:

$$G = (DR)^T \cdot G \cdot (DC)^T$$

15 The condition number of G is checked against the condition number of G of the previous iteration (block 115), and if it is less than a predetermined number, the process exits. If the difference is greater than the predetermined number ϵ , (tolerance level), the process repeats at block 101, and the condition number of the iteration just completed is

saved (block 120). Note that the first time through the loop, the answer to block 115 is always NO. In a typical case, the number of iterations is about ten (10).

At the r^{th} iteration, when the process is exited

$$DR = DR(1) \cdot DR(2) \cdot \dots \cdot DR(r).$$

5 $DC = DC(1) \cdot DC(2) \cdot \dots \cdot DC(r).$

and

$$G(s) = DR \cdot G \cdot DC$$

The solutions obtained above off-line are then applied to the controller, and specifically to the RMPC controller of the predetermined embodiment. The scaled
10 model data is loaded in the RMPC controller (i.e., $G(s)$). $G(s)$ is essentially a new gain matrix with different cv units and mv units. Also loaded are the pre and post scale factors determined above, yielding a controller 10 configuration as shown in Figure 1.

Although the above has been described in conjunction with the RMPC, it will be understood by those skilled in the art the technique of optimal scaling can be applied to
15 any process controller.

While there has been shown what is considered the preferred embodiment of the present invention, it will be manifest that many changes and modifications can be made therein without departing from the essential spirit and scope of the invention. It is intended, therefore, in the annexed claims to cover all such changes and modifications
20 which fall within the true scope of the invention.

CLAIMS

- Claim 1. In a process control system having a controller for providing robust control to a process, the process further having at least one manipulated variable and at least one process variable, a method for providing the robust control of a process,
- 5 comprising the steps of:
- a) calculating a set of scale factors for the manipulated variables and the process variables;
 - b) initializing the controller with the set of scale factors, the set of scale factors determining a relative importance to the
 - 10 process of the manipulated variables and the process variables;
 - c) initializing the robust control to have predetermined constraints of the manipulated variables and the controlled variables;
 - 15 d) obtaining present values of the manipulated variables and the process variables said process variables corresponding to measurement parameters of the process;
 - e) calculating new values of the process variables for a predetermined number of points in the future in order to have the values of the process variables
 - 20 within the predetermined range to obtain an optimal robustness of the resultant controller, the manipulated variables being within predetermined constraints, and the process variables falling within a predetermined range when

controllable; otherwise, keeping process variable constraint violations to a minimum;

f) from a plurality of solutions, selecting a most robust solution; and

5 g) controlling the process in accordance with the most robust solution.

Claim 2. A method according to Claim 1 wherein the step of calculating a set of scale factors includes the steps of:

10 a) defining a diagonal matrix including row scaling matrix, a gain matrix of the controller, and a column scaling matrix;

b) from the row scaling matrix, determining a pre scaling factor;

c) from the column scaling matrix, determining a post scaling factor;

d) from the pre scaling factor and the post scaling factor, determining a condition number;

15 e) determining if the condition number is less than a predetermined tolerance level;

f) if the condition number is greater than the predetermined tolerance level, repeating step (b) thru step (e), otherwise continuing;

20 g) calculating the set of scale factors from the pre scale factors and the post scale factors calculated from each iteration for loading into the controller.


Claim 3. In a process control system, a method for providing robust control of a process according to Claim 2, wherein the step of controlling comprises the steps of:

- a) outputting the manipulated variables of the most robust solution of step (f) of Claim 1 to the process; and
- b) adjusting the process in response to the manipulated variables to cause the process control system to drive the values of the process variables to the calculated values of step (f) of Claim 1, thereby providing the control of the process.

Claim 4. In a process control system, a method for providing robust control of a process according to Claim 3, wherein the step of selecting comprises the step of:

- a) determining a set of controlled variables which correspond to minimum controller magnitude.

Fig. 1

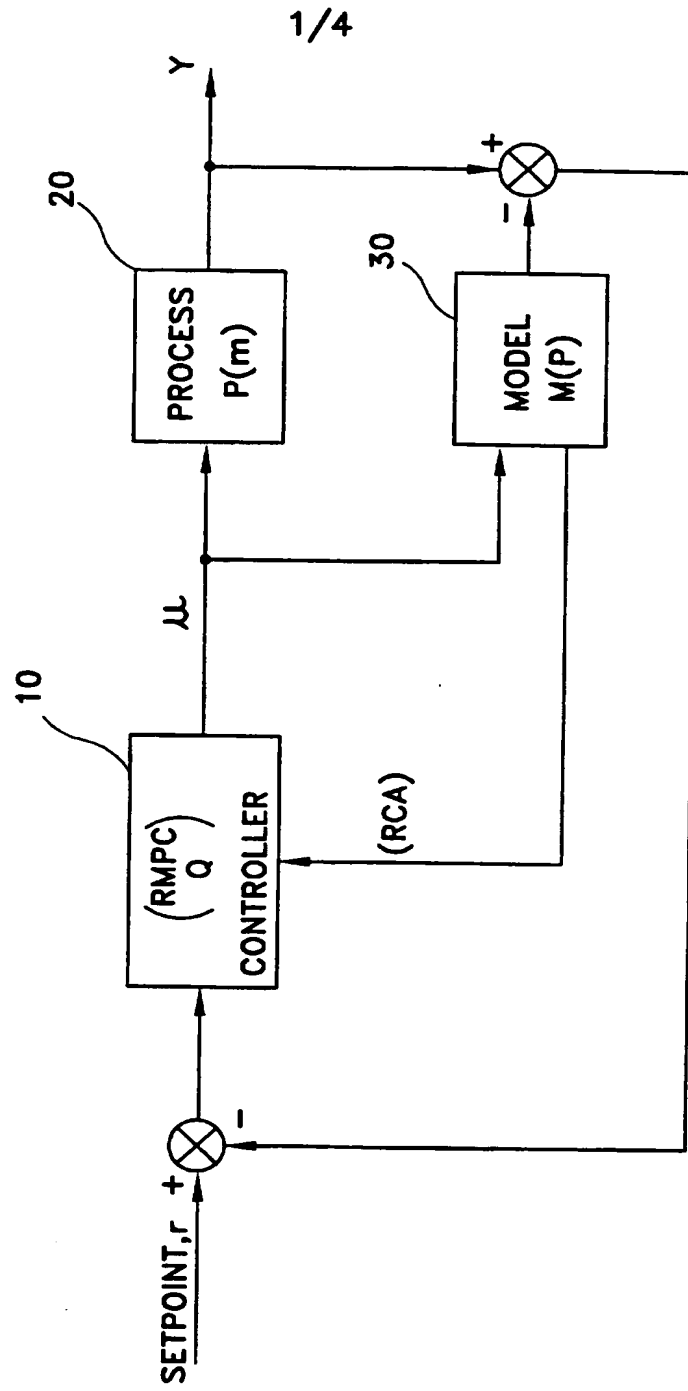

2/4

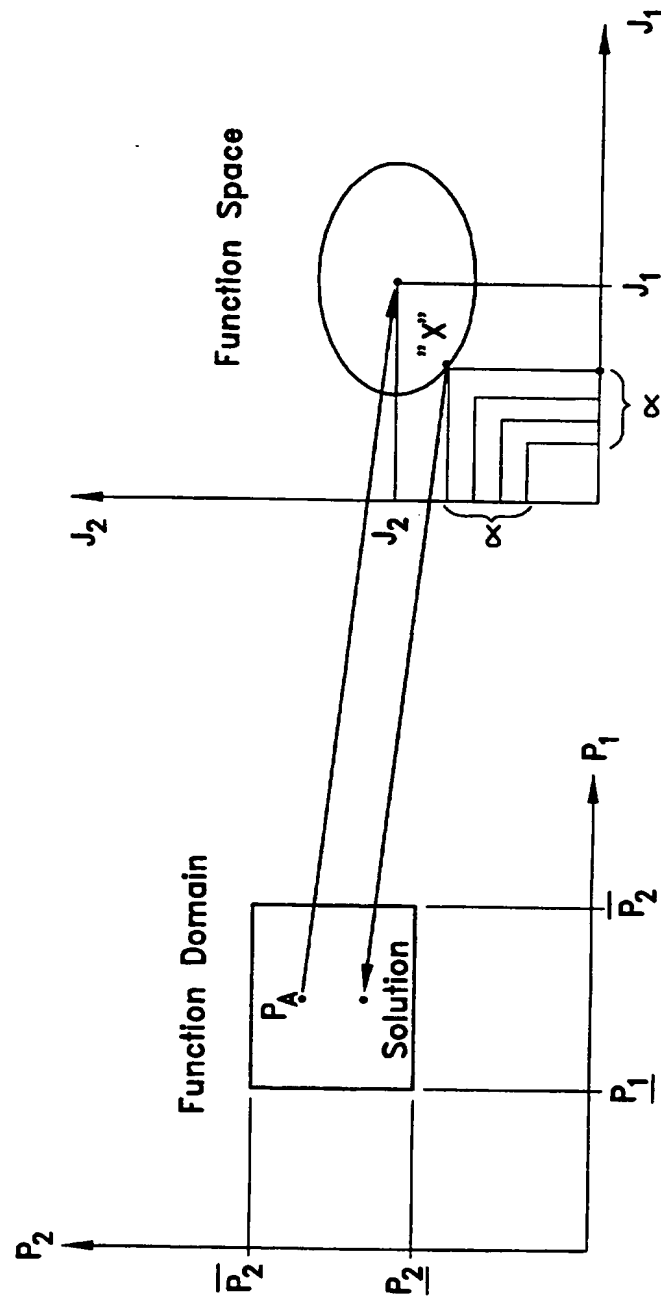


Fig.2

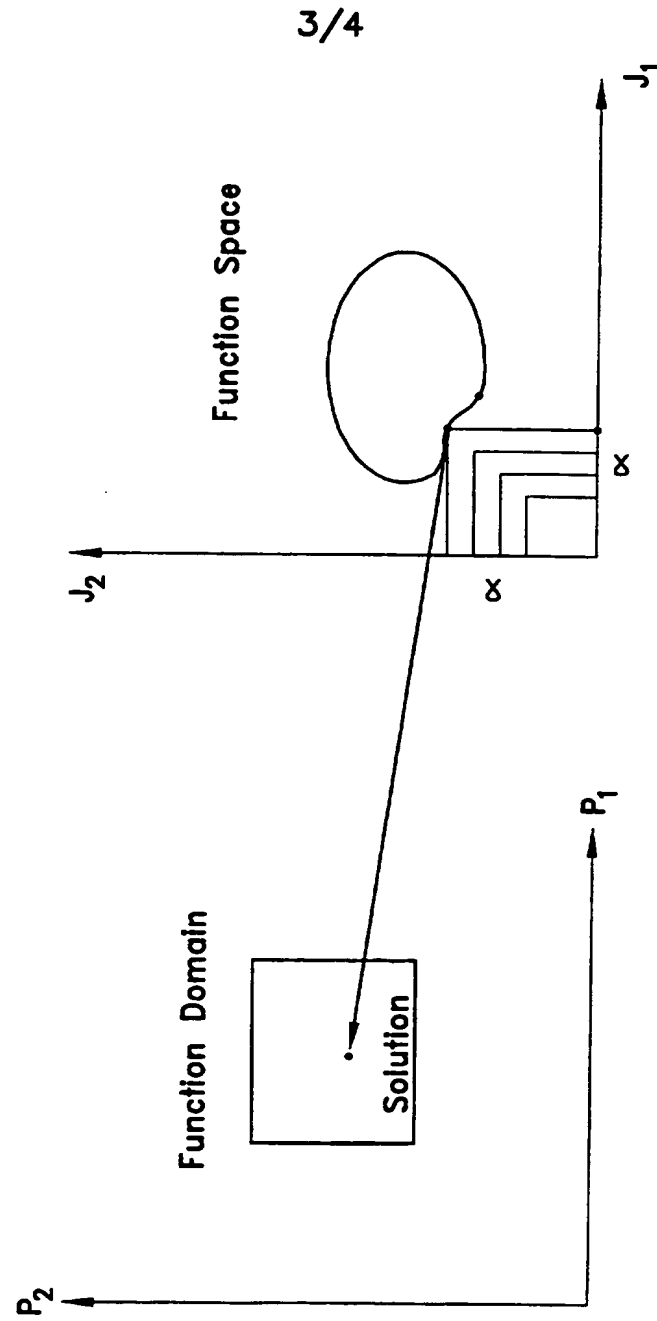


Fig. 3A

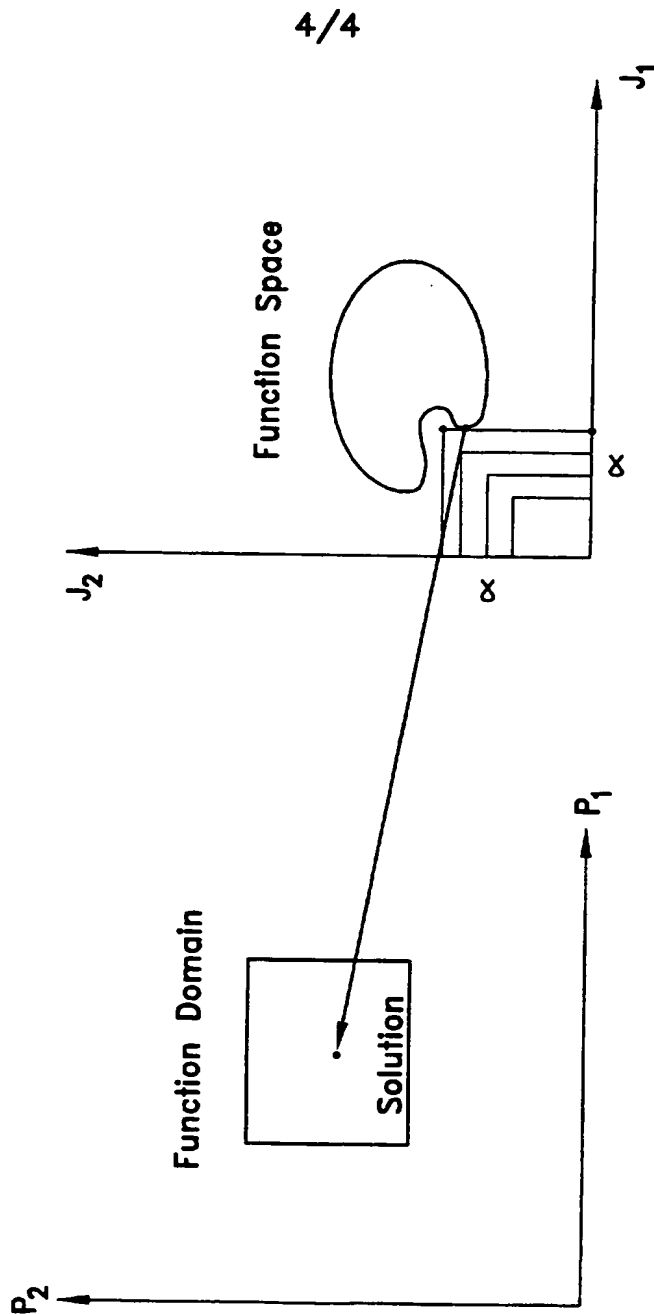


Fig. 3B

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 96/04486

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G05B5/01 G05B13/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 G05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO,A,94 17458 (HONEYWELL) 4 August 1994 cited in the application see the whole document -----	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

20 June 1996

Date of mailing of the international search report

24. 07. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Kelperis, K

INTERNATIONAL SEARCH REPORT

Inter. al Application No
PCT/US 96/04486

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9417458	04-08-94	US-A- 5351184 EP-A- 0681714	27-09-94 15-11-95
